


LAMPIRAN

Lampiran 1 Proses *Blending* Bahan Bakar



Lampiran 2 Proses Pemasangan Kabel

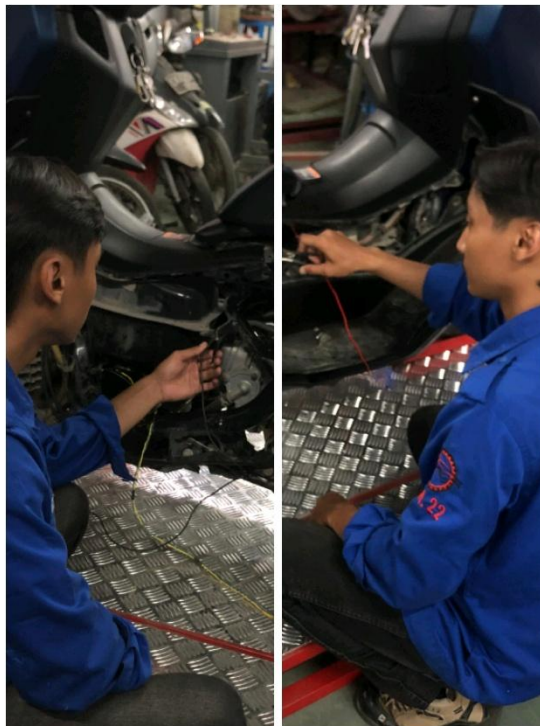

Lampiran 3 Proses Pemasangan *Tie Down*



Lampiran 4 Data Hasil Uji Pertamina Murni

Date&Time	Engine	Owner	Max RPM Wheel	Max Kph	Max RPM Engine	Max Torque	Max HP	Max AFR
20-07-2025 09:29:57	N-MAX	Super Admin	3330	50.19@8605 RPM	8605	6.54 Nm4.81 lb-ft@8605 RPM	7.88 HP@8605 RPM	10@8605 RPM
20-07-2025 09:30:38	N-MAX	Super Admin	7740	116.66@9897 RPM	9897	6.53 Nm4.8 lb-ft@7407 RPM	7.7 HP@8907 RPM	10@8907 RPM
20-07-2025 09:33:23	N-MAX	Super Admin	4500	67.82@7015 RPM	7015	6.99 Nm5.14 lb-ft@7015 RPM	6.87 HP@7015 RPM	10@7015 RPM
20-07-2025 09:34:32	N-MAX	Super Admin	6210	93.6@9445 RPM	9445	7.21 Nm5.3 lb-ft@7048 RPM	8.34 HP@9445 RPM	10@9445 RPM

20-07-2025 08:53:41	N-MAX	Super Admin	6930	104.45@8971 RPM	8971	7.66 Nm5.63 lb-ft@7253 RPM	8.47 HP@8971 RPM	10@8971 RPM
------------------------	-------	-------------	------	-----------------	------	----------------------------	------------------	-------------

Lampiran 5 Data Hasil Uji Pertamax dan Butanol 15%

Date&Time	Engine	Owner	Max RPM Wheel	Max Kph	Max RPM Engine	Max Torque	Max HP	Max AFR
20-07-2025 09:36:14	N-MAX	Super Admin	7920	119.37@9966 RPM	9966	8.81 Nm6.48 lb-ft@7876 RPM	10.28 HP@9099 RPM	10@9099 RPM
20-07-2025 09:35:45	N-MAX	Super Admin	7650	115.3@9826 RPM	9826	8.69 Nm6.39 lb-ft@8386 RPM	10.43 HP@9484 RPM	10@9484 RPM
20-07-2025 09:35:14	N-MAX	Super Admin	5760	86.81@7694 RPM	7694	9.08 Nm6.68 lb-ft@7694 RPM	9.79 HP@7694 RPM	10@7694 RPM
20-07-2025 09:31:03	N-MAX	Super Admin	7650	115.3@9923 RPM	9923	8.34 Nm6.13 lb-ft@7716 RPM	9.65 HP@8933 RPM	10@8933 RPM

20-07-2025 08:55:15	N-MAX	Super Admin	7560	113.94@9775 RPM	9775	8.35 Nm6.14 lb-ft@7535 RPM	9.29 HP@8741 RPM	10@8741 RPM
------------------------	-------	-------------	------	-----------------	------	----------------------------	------------------	-------------